

Vollmer Touchscreen VTS


Verarbeitet die Signale digitaler Meßtaster in Vollmer-Kontaktmeßgeräten:

- Banddickenmessung bis ca. 9 mm ohne Meßtasterverstellung
- Wertet bis zu 4 Meßstellen gleichzeitig aus
- Automatischer Nullabgleich
- Toleranz-Status farblich angezeigt
- Leicht bedienbar dank Klartextanzeigen
- Filter zur Dämpfung unrealistischer Peaks
- Trenddarstellung der letzten 2 Minuten



Data processing and display for Vollmer contact gauges with digital transducers:

- Strip thickness measurement up to 9 mm without transducer adjustment
- Evaluates up to four gauges simultaneously
- Automatic zero adjustment
- Tolerance status indicated by background color
- Clear text messages for easy operation
- Unrealistic peaks can be filtered
- Trendgraph display showing the past two minutes

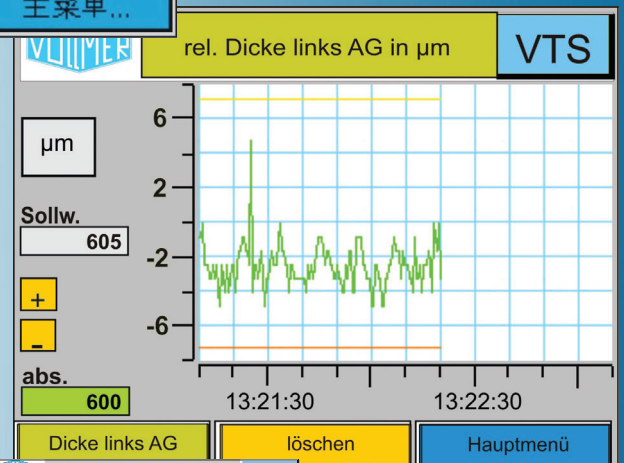

alle Messstellen VTS

| | |
|---------------------|---------------------|
| 1.985 | 1.977 |
| abs. Dicke 1 in mm | abs. Dicke 2 in mm |
| 5.324 | 5.346 |
| abs. Breite 1 in mm | abs. Breite 2 in mm |

rel. Breite 1 in mm VTS

| |
|--------------------------------|
| 3.116 |
| 1.117 |
| 1.999 Sollwert pos. Tol. 0.046 |
| 0.057 |

rel. Breite 1 in mm VTS

| |
|--------------------------------|
| 2.016 |
| 0.017 |
| 1.999 Sollwert pos. Tol. 0.046 |
| 0.057 |